

THE LATEST SOLUTION IN SPACE SAVING POTABLE WATER PRESSURE BOOSTING

The Elvaro B is another combined tank and variable speed pump set designed to minimise the space used up by the components of a similar installation where the tank is located alongside the pump set.

Variable speed operation of the pumps ensures a longer life of the pipework system due to removal of the water hammer common with fixed speed operated pumps.

Mounting the tank on a steel frame above the pumps not only provides a space saving solution but is also an ideal replacement for an existing installation where larger tank capacity can be obtained in the available space.

Typical applications are:

- ▶ Boosted domestic water supplies to residential buildings, office buildings, factories, hospitals, hotels and schools.
- ▶ Booster water supplies for irrigation, washdown systems and cleaning systems - (Cat 5 air-gap arrangement of the tank is available for these).

GRP Tank

Pumps in steel frame



TRICEL
PUMPS

ELVARO

B- Range

FEATURES

Intelligent Variable Speed Control

In situations of high or low demand, the pumps automatically cycle on/off or ramp up/down which will save on energy costs and deliver optimum performance levels at all times.

Speedy Delivery

Available on most standard models within the range.

Instant Pressure - 'plug and pump'

A standard factory configuration, meaning the system is ready to provide a constant water pressure as soon as it is put into operation.

Ease of Operation

The system is operated directly from the pump VSDs (Variable Speed Drives) mounted above the pump. Adjustment can be made to the control features from the VSDs if required.

The standard configuration of all systems:

- ▶ GRP insulated, WRAS Approved storage tank
- ▶ Variable speed operated centrifugal pumps
- ▶ Low water level pump protection
- ▶ Common alarm signal output
- ▶ Full WRAS approval of pump set in process



GRP Insulated Tank

WRAS approved with 50mm insulation and sealed lid. Nominal capacity of 500litres, 1000litres, 1500litres and 2000litres (other sizes available on request). Arranged with Category 4 (Type AF) or Category 5 (Type AB) air gaps when required.

The tank is supported on a powder coated steel frame above the pump set and is fitted with an inlet float valve, screened overflow and float switch (for low level protection).




Pumps Sets

WRAS approved single, twin or triple pump sets mounted on a powder coated steel frame below the tank. Pumps and manifolds in stainless steel. Performance of the standard range of sets is a flow from 4 to 30 m3/hr, with a discharge pressure range from 25 to 80 m.hd. (larger performance is available on request).

Each pump is fitted with a variable speed drive above the motor and dry run protection. Twin and triple pump sets have a control panel to configure the duty arrangement and alternate operation. Standard power supply is 230v/1ph/50Hz (400v/3ph/50Hz available as an option).

PERFORMANCE CURVE: ELVARO B-Range

ELVARO-B Operating Range

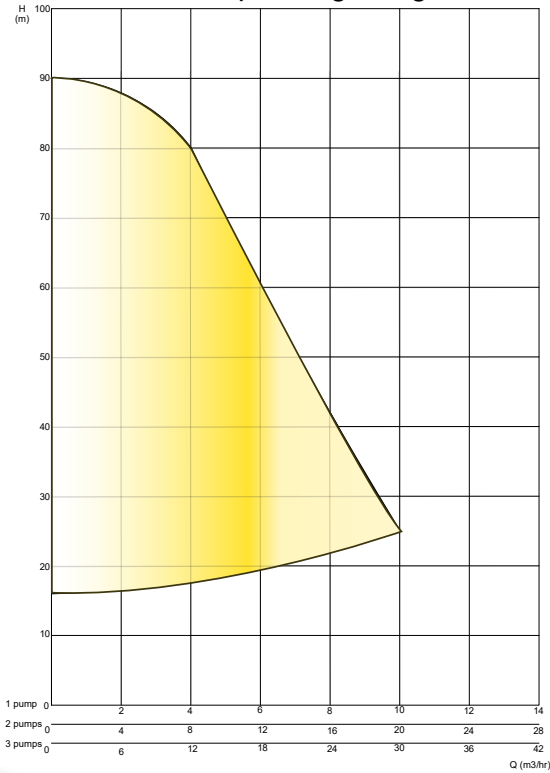

GENERAL INFORMATION	
Pump Arrangement	Single/twin/triple
Tank Sizes	500/1000/1500/2000litre nominal capacity (standard range)
Pump Operation	Duty, duty/standby, duty/assist, duty/assist/standby, duty/assist/assist
Flow range	4 – 30 m3/hr (standard range)
Pressure range	25-80m.hd (standard range)
Max system pressure	10 bar
Max system temperature	23°C
MATERIAL INFORMATION	
Pumps	Stainless steel AISI 304 (WRAS approved)
Manifolds	Stainless steel AISI 304
Tank	GRP with insulation (WRAS approved)
Mounting Frame	Epoxy Powder coated steel

CONTACT

Tricel Pumps Hampshire

HEAD OFFICE

Unit 14 Arnside Road, Waterlooville Hampshire, PO7 7UP, United Kingdom
Tel: +44 (0)23 9226 8511
Email: websales@tricelpumps.co.uk

Tricel Pumps London

Unit 8 Victoria Ind. Est., Victoria Road Dartford, Kent, DA1 5AJ, United Kingdom
Tel: +44 (0)13 2227 1511
Email: service@tricelpumps.co.uk

