



TRICEL
GENERATIONS OF INNOVATION

THE LATEST SOLUTION IN SPACE SAVING POTABLE WATER PRESSURE BOOSTING

The Elvaro T is a combined tank and variable speed pump set solution designed to maximise the water storage available within a minimum available space.

Variable speed operation of the pumps means system pipework lasts longer due to the removal of the water hammer common on fixed speed operated pumps. This also provides a reduction in energy consumption and is much quieter when in operation.

The compact design of the unit not only provides a space saving solution, but is an ideal replacement for an existing installation. Smaller units in the range can fit through standard doorways without having to be dismantled.

Typical applications are:

- ▶ Apartment buildings
- ▶ Hospitals
- ▶ Hotels
- ▶ Irrigation
- ▶ Schools
- ▶ Washing & cleaning (Cat 5 available)



ELVARO

T- Range

FEATURES

Intelligent Variable Speed Control

In situations of high or low demand, the pumps automatically cycle on/off or ramp up/down which will save on energy costs and deliver optimum performance levels at all times.

Speedy Delivery

Available on most standard models within the range.

Instant Pressure - 'plug and pump'

A standard factory configuration, meaning the system is ready to provide a constant water pressure as soon as it is put into operation.

Ease of Operation

The system is operated directly from the pump VSDs (Variable Speed Drives) mounted above the tank. Adjustment can be made to the control features from the VSDs if required.

The standard configuration of all systems:


- ▶ GRP insulated, WRAS Approved storage tank
- ▶ Variable speed operated submersible pumps
- ▶ Low water level pump protection
- ▶ Common alarm signal output
- ▶ Full WRAS approval of pump set in process

ELVARO T-range IN MORE DETAIL



GRP Insulated Tank

WRAS approved with 25mm insulation with sealed lid. Nominal capacity from 500litres to 2250litres. Standard CAT 4 (Type AF) air gap with CAT 5 (Type AB) available on larger tanks.



Discharge

Stainless steel manifold c/w pressure vessel, pump and pressure vessel isolating valves and pump NRVs terminating in male threaded connection. 1 1/4inch BSP on single, 1 1/2inch on twin, 2inch on triple pump sets.



Pumps


Submersible pumps constructed from AISI 304 stainless steel. The flow range is 2m³/hr to 30m³/hr. The pressure range is 20 to 60m.hd.



Controls

Variable speed drives fitted on support plates above the tank configured to control the pump/pumps with an adjustable set point to provide a constant discharge pressure with automatic duty/standby or duty/assist operation. A float switch provides a low level protection. A common volt free alarm system is provided. Power Supply: 240v/1ph/50Hz standard, with 415v/3ph/50Hz option available.

PERFORMANCE CURVE: ELVARO T-range

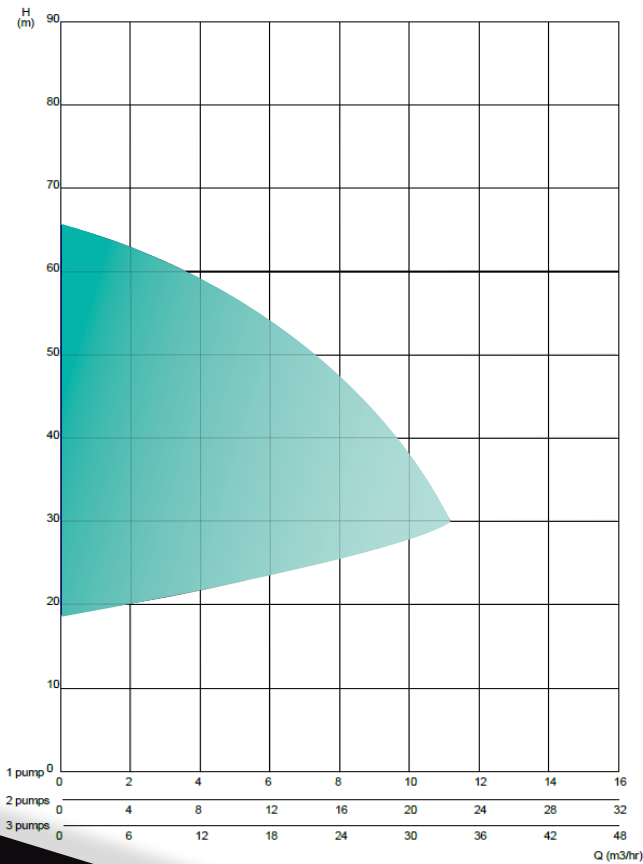

GENERAL INFORMATION

Product range	1-3 pumps
Operation	duty, duty/standby, duty/assist, duty/assist/standby, duty/assist/assist
Flow range	2m ³ /hr to 30m ³ /hr
Pressure range	20 to 60m.hd
Max system pressure	10 bar
Max system temperature	23°C

MATERIAL INFORMATION

Manifold	Stainless steel AISI 304
Pumps	Stainless steel AISI 304
Tank	GRP with insulation (WRAS approved)

CONTACT

Tricel Portsmouth

HEAD OFFICE

Unit 14 Arnside Road, Waterlooville
Hampshire, PO7 7UP, United Kingdom
Tel: +44 (0)23 9226 8511

EMAIL: WEBSALES@TRICELPUMPS.CO.UK

Tricel Dartford

Unit 8 Victoria Ind. Est., Victoria Road
Dartford, Kent, DA1 5AJ, United Kingdom
Tel: +44 (0)13 2227 1511

WWW.TRICELPUMPS.CO.UK



TRICEL
GENERATIONS OF INNOVATION